

SX-70 COVER INSTALLATION INSTRUCTIONS

1. Please remove your old camera cover. Also remove any dirt, oil and moisture from the camera surface. Adhesive WILL NOT adhere if the surface is not completely clean.

Clean your hands from any dirt or oil.

2. Detach the camera cover section you want to install first. We recommend to start with the back side of the camera.



3. Do not apply pressure until you are satisfied with the positioning of the cover piece.




4. Open the camera completely to apply the front covers.



5. Close the camera flat to apply the last portion of the front cover.

6. Do not apply pressure until you are satisfied with the positioning of the cover piece.

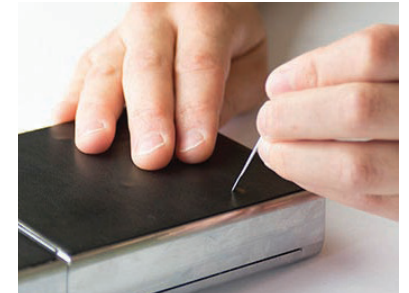

7. If you have bubbles under the leather cover you can eliminate them by using a needle or pin to make a single hole in the bubble. THE NEEDLE HAS TO HAVE A VERY SMALL POINT. The hole will be so small, it won't be noticeable on the leather as long as you make a direct poke. Do not move the pin around or you'll risk ripping the leather or making a noticeable hole. After you've pricked the bubble, use your finger to run over the area and you'll see it disappear. This is a great method and works well.

Please allow 72 hrs. for the adhesive to cure (to do its job)

If you have any question please contact us at hugo@hugostudio.com

Please visit our store to see our new camera cover materials
www.hugostudio.com

